

2021-22 FENCING CATALOGUE

WARATAH MEANS SOMETHING TO EVERYONE.

WARATAH MEANS Australian Made More Control Local Knowledge

Waratah are the true fencing specialists. The Waratah brand means something to everyone - increased productivity, more time or even a brighter future.

waratah means Anstralian made

Waratah has over 135 years of fence manufacturing and fence building experience in Australia. With mills in Whyalla SA, Geelong VIC, Rooty Hill and Newcastle NSW, our steel, wire and posts are made by Australians to suit Australian conditions.

Australian born and bred, we know what it takes to withstand the harshness of this diverse environment, whether it's rocky high country, fertile plains or steamy tropics. Our ongoing product innovation continues to meet the evolving fencing needs of Australian farmers right across this great country.

WARATAH MEANS more control

Waratah's accreditation includes globally recognised quality standards SAI Global AS/NZS ISO 9001 and nationally recognised testing authority NATA ISO/IEC 17025. This consistency means that Waratah can provide you with the strong and reliable fencing you need for your farm.

WARATAH MEANS local knowledge

Our experienced sales staff understand their local areas and are equipped with the knowledge to help with your fencing needs. They're backed by a national research and development team always working to create fencing system solutions to suit almost any application and condition.

POST RANGE

POSTS

2

POSTS

The key to a fence's strength and longevity, Waratah posts are the superior quality backbone to a better performing fence.

- All posts in the range work seamlessly with our wire and accessories for superior performance
- Effective strainer post assemblies help improve the life of your fence by carrying the strain of the wire and absorbing impact from animals
- Challenge your traditional fencing practices to discover the benefits of the complete Waratah Fencing System[™]

Covered in this section:





Strainer post assemblies

JiO® posts



Fence & Wire droppers



Blue Latch™ & GalStar® posts





STRAINER POST ASSEMBLIES



SPECIFICATIONS

Pipe:	89mm (OD) x 4mm (wall)	
Material:	250 grade pipe	
Coating:	Hot dipped galvanized (min 300g/m²)	
Lengths available: 2.15m, 2.50m, 3.25m		

EZYPIPE[®] STRAINER POST

The Waratah[®] round post alternative to traditional timber, pipe and concrete strainer posts.

- Best suited to medium-soft ground applications where the greater surface area and anchor points provide improved ground-holding capacity
- Economical to erect and capable of withstanding high pressure loads
- > Termite proof and fire resistant
- > Can be stayed up to 4 ways through 360 degrees and is also suitable as an in-line strainer
- > Hot dipped galvanized coating (min 300g/m²) for good corrosion protection
- Ezypipe strainer extensions can be used with an Ezypipe strainer post
- Anchor points on the strainer allow for Star[®] posts to be driven through as an anchor pin to provide greater holding capacity

Gate fittings available - see page 38



SPECIFICATIONS

Angle:	75mm x 75mm x 6mm	
Material:	300 grade angle	
Coating:	Hot dipped galvanized (min 600g/m²)	
Lengths available	engths available: 2.10m, 2.50m	

EZYSLOT[®] STRAINER POST

The fastest and easiest Waratah strainer post to manually install.

- > Best suited to hard-medium ground applications as the pointed end of the Ezyslot can punch through ground that would be more difficult for round strainer posts
- > Economical to erect and capable of withstanding highpressure loads
- > Termite proof and fire resistant
- 2.10m strainer can be stayed 3 ways through 90 degrees and 2.50m can be stayed 4 ways through 180 degrees
- > Hot dipped galvanized coating (min 600g/m²) for excellent corrosion protection
- Anchor points on the strainer allow for Star[®] posts to be driven through as an anchor pin to provide greater holding capacity

Gate fittings available - see page 38



ADJUSTA-STAY®

One of the most versatile stays on the market. Can be used with the Ezyslot[®], Ezypipe[®] and most timber, concrete or pipe strainer posts.

- > Fully adjustable and reusable stay (sold as a kit, see specifications)
- > Effective in all types of terrain including sloping, hard or rocky ground
- > Termite proof and fire resistant
- > Designed for strength, reliability and ease of use
- Requires no digging and can be installed in less than five minutes with correct tools (optional Adjusta-stay tube socket available)
- > Plastic ground engaging pad

SPECIFICATIONS

Ріре:	50NB pipe x 60.30mm (OD) x 2.30mm (wall) x 3m length
Coating:	Hot dipped galvanized (min 300g/m²)
Hot dipped tension rod length:	3.25m x M12 (12mm) with nuts and washers
Ground engaging pad:	Plastic (recycled)

See how quick and easy it is to install!

SUGGESTED STRAINER POST INSTALLATION HEIGHT

POST	ABOVE GROUND (MM)	IN GROUND (MM)
Ezypipe 2.15m	1300	850
Ezypipe 2.50m*	1400–1600	900–1100
Ezypipe 3.25m	2050	1200
Ezyslot 2.10m	1250	850
Ezyslot 2.50m	1350	1150

*Adjustable collar locations using pre-drilled holes – collar comes pre-set at 2nd hole (1500mm above ground), but can be adjusted to 1400mm or 1600mm above ground.




POSTS

POSTS

3-11



Jio[®] Post Range

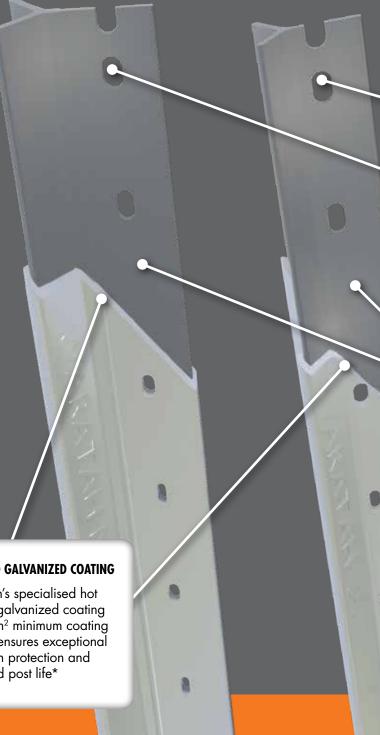

-

WARATAH® JIO HOLES

- > More holes than traditional Y posts for greater wire attachment options
- > Oversize holes accommodates running wire through holes (not recommended by Waratah)
- > Multiple accessory options for adding clips, ties, and electrics
- > JiO Longlife Blue[®] post clips deliver fast, secure wire fixing

WARATAH Y-BAR

- > Australian made EY60 steel grade designed specifically for use in post applications to deliver the right balance of strength, toughness and ductility - the best steel to weight ratio of any Star® post
- > Strength to withstand high impact loads, toughness to resist fracturing & ductility allows posts to be re-straightened

HOT DIPPED GALVANIZED COATING

POSTS

> Waratah's specialised hot dipped galvanized coating (600g/m² minimum coating weight) ensures exceptional corrosion protection and extended post life*



JiO[®] POSTS



Jio Maxy®

JiO[®] STAR[®]

post ever made

reliable fence post product

> The JiO MaxY post is twice as strong and double the profile of the JiO Star post for improved ground holding and performance

> The original Y shape fence post, Waratah®'s most

> The strongest, toughest, most flexible Waratah Star

> Lengths available: 135cm, 150cm, 165cm, 180cm,

210cm, 225cm, 240cm and 270cm

- > Great intermediate post option compared to timber, concrete or pipe
- Lengths available: 180cm, 210cm, 225cm, 240cm and 270cm





Easier transportation compared to timber, concrete and pipe



Easy installation with a manual or pneumatic driver



Termite proof & fire resistant




Tried and tested in the lab and field



POST SIZE AND HOLE ALIGNMENT GUIDE

The measurements below show that the first hole from the top of the post is 2.30cm. The measurement then shows distance between holes. The 5.08cm distance is to accommodate the use of JiO[®] post clips.

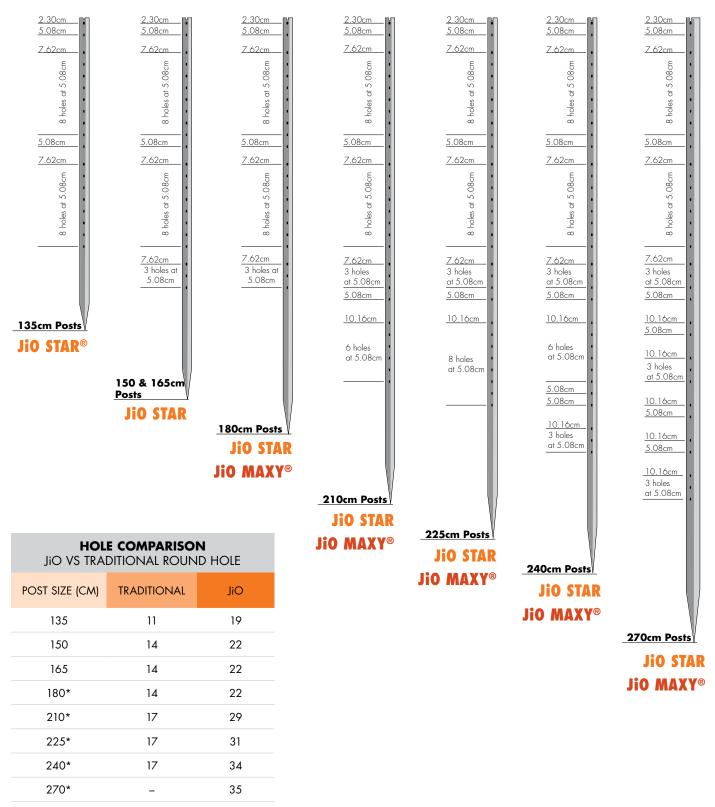

*JiO MaxY post is only available in these sizes

BLUE LATCH[™] & GALSTAR[®] POSTS

- > Each Longlife[®] coated latch is a spring which keeps the latch closed and the fence wire securely attached
- > Slots to suit 3, 4 and 5 barbed wire and plain wire fence configurations and comes with hole spacings to suit attachment of 90cm prefabricated fence
- > Standard JiO[®] Star profile
- > Quicker installation of the fence with minimal use of tie wire and clips
- > Waratah[®] specialised hot dipped galvanized coating (600g/m² minimum coating weight)
- > Lengths available: 165cm & 180cm

165cm and 180cm Posts

2.5cm

13.0cm 10.0cm

<u>10.0cm</u> <u>10.0cm</u>

<u>6.0cm</u>

12.0cm

7.5cm 7.5cm

<u>8.0cm</u>

7.0cm 7.5cm

<u>6.0cm</u>

9.5cm

165cm and 180cm Posts







GALSTAR MAXY® **ID GALSTAR** EXTREME® > The traditional round hole post

- > Consistently rolled Y-bar ensures posts are straight and gives torsional strength to the post
- > Waratah specialised hot dipped galvanized coating (600g/m² minimum coating weight)
- > GalStar MaxY lengths available: 180cm
- > GalStar Extreme lengths available: 165cm, 180cm

POSTS

53mm

254mm


127mm

127mm

254mm

266mm



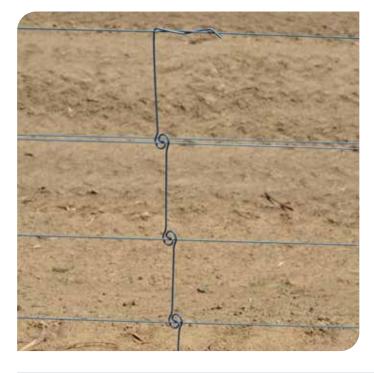


POSTS

WIRE DROPPERS

- > Wire droppers are used to increase the strength of your plain or barbed wire fence and keep multiple line wires evenly spaced
- > Available in a range of sizes to fit most fences
- > Easy to install, lightweight for maximum fence efficiency
- > Coated with Waratah® Longlife Blue® technology
- > Available with different colour packaging to determine different lengths

COLOUR	LENGTH	SPACINGS	NUMBER OF LOOPS	FENCE WIRES
RED	61cm	28-33	1	3
BLACK	78cm	26-26-26	2	4
OLIVE	91cm	15-15-18-20-23	4	6
WHITE	91cm	30-28-33	2	4
ORANGE	104cm	13-15-15-18-20-23	5	7
LIGHT GREEN	106cm	13-15-15-18-20-25	5	7

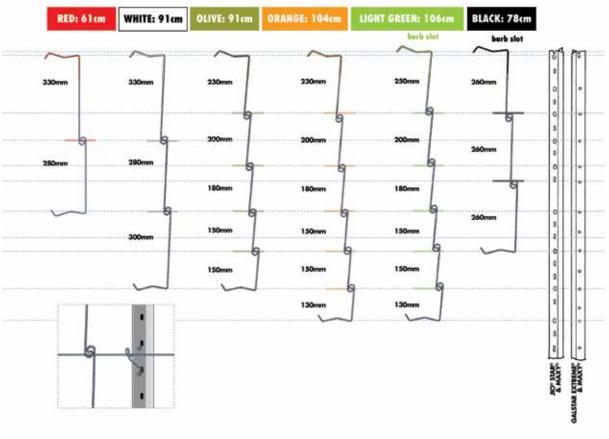

POSTS ^

ADVICE FOR FARMERS, FROM FARMERS

"When you're contract fencing on a metre rate you need consistency in every aspect, whether it's driving posts or straining wire up. As a third generation fencing contractor in the Perth hills I've found Waratah® is the only way to achieve the best fence at the best price. For the client it's first because it lasts. For me it's first because it works." – Jason Burton, WA

"Due to the dry conditions of the area, myself and other landholders in the cluster have found that the fence has helped maintain pastures in dry conditions with the fence also keeping out other pests." – Dean Hague, NSW

"We've used a lot of Waratah on other properties and it's always lasted. After a few years the fence still looks new." – Eric Ashby, SA

"I use Waratah because I know what I'm getting. After going through the factory and seeing all the testing and the entire manufacturing process from start to finish, I have a lot of confidence in the product. It is 100% Australian made and at a competitive price, I recommend it to all my customers."

– James Cameron, WA

Want to read more testimonials from our customers? Scan the QR code





Dean Hague



James Cameron



FENCE DROPPER

- > Maintain fence integrity and help spread stock pressure to all wires in the fence, reducing overloading and breakage risk
- Quickly fastened to new or existing fence using Longlife Blue[®] dropper clips
- > Heavy galvanized droppers (275/m²) for additional life
- Available in 63.5cm, 81.5cm, 94cm, 107cm and 117cm
- > Extra Longlife Blue fence dropper clips available



WIRE RANGE

WIRE RANGE



WIRE

- > Quality wire is essential for the life and performance of your fence
- > Longlife Blue[®] fence wire uses innovative technology exclusive to Waratah[®]
- > Longlife Blue is a high-performance product that's been tried and tested to last as part of a complete Waratah fencing system

Covered in this section:

YIIIK

Longlife Blue wire technology

Barbed wire







Prefabricated wire

X

Netting



Wire specifications





LONGLIFE BLUE® WIRE TECHNOLOGY

IF IT'S NOT BLUE, IT'S NOT WARATAH®!

WARATAH WIRE

The wire core is made with the finest quality steel.

TERNARY LAYER

A coating layer closest to the wire core comprising of zinc/ aluminium/iron. This layer is enriched in aluminium – enhancing both ductility and corrosion protection. This is the most important layer for the coating performance and is ensured to be "intact" and complete all around the wire.

ZALCOTE® COATING

The zinc aluminium coating provides barrier and galvanic protection of the steel that does not fracture or flake when tying off.

PERMASEAL® BLUE COATING

The organic polymer layer of the Permaseal not only gives Longlife Blue colour its unique look, but also adds further protection.





LONGLIFE BLUE® WIRE TECHNOLOGY



15

WARATAH

WHY BUY LONGLIFE BLUE WIRE?

Longlife Blue coating is proven in the lab and in the field for over 20 years.

Good quality fence wire, whether plain, barbed, prefabricated or netting, is key to the life of a fence. If you want a fence that lasts, you'll need Australia's leading fence wire, Waratah[®] Longlife Blue.

WARATAH IS THE ONLY VERTICALLY INTEGRATED AUSTRALIAN WIRE MANUFACTURER

Mine – Whyalla, SA



Steel mill – Whyalla, SA & Rooty Hill, NSW



Rod mill – Newcastle, NSW

Wire drawing & coating – Newcastle, NSW & Geelong, VIC



PREMIUM WIRE CORE

At the centre of Longlife Blue's performance advantage is a premium steel wire core. The quality and consistency of the wire core provides strength, makes it easier to handle and means less breaks. Longlife Blue wire has a thicker wire core, making the wire stronger and more reliable.

PREMIUM WIRE COATING

Longlife Blue wire products are coated with Zalcote[®] and Permaseal[®] technologies – exclusive to Waratah. Manufactured in Australia to exceed Australian Standards, NATA & Waratah lab testing requirements.

LONGLIFE VS HEAVY GALVANIZED VS STANDARD GALVANIZED CORROSION PERFORMANCE



YIII WIRE

BARBED WIRE RANGE






HIGH TENSILE LONGLIFE BLUE® BARBED WIRE

If a high tensile wire breaks when installing it can cause severe injury. That's why Longlife Blue high tensile barbed wire has a reverse-twist pattern, which allows the wire to unravel when it is placed under an abnormal load and reduces possible breakage.

- > 2.00mm provides 25% greater strength than 1.80mm barb recommended for high pressure situations
- 1.80mm provides 25% greater strength than 1.57mm barb
 recommended for use on boundary fences where falling tree limbs or animal pressure can be greater
- > 1.57mm available for low pressure situation
- Reverse-twist pattern provides maximum strength and safety
- > Our barbed wire range proudly meets all Australian safety standards, meaning if used correctly it will provide you with the safety and security you need
- Consistent and closer barb spacing (10cm) means more barbs for maximum stock pressure and security
- No joins in the wire coil provides consistent strength along the length of the reel and reduces in the risk of injury when straining. Whilst the Australian Standard allows for up to 3 joins per reel at Waratah we don't accept any – rejecting all rolls that require a join
- > The wooden reel allows for easy unwinding of the wire

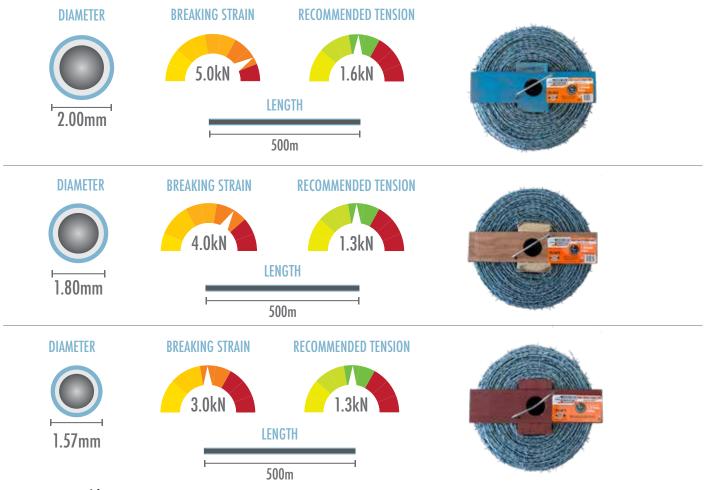

BARBED WIRE RANGE



IOWA LONGLIFE BLUE® BARBED WIRE

Made from low tensile wire in a continuous twist pattern, lowa offers:

- > A more effective option in fire prone areas compared to high tensile wire
- > Continuous-twist pattern locks the barbs in place to reduce any movement with stock pressure
- > Easier to handle along the fence line than high tensile wire
- > Consistent barb spacing of 10cm
- No joins in the wire coil provides consistent strength along the length of the reel and reduces the risk of injury when straining. Whilst the Australian Standard allows for up to 3 joins per reel at Waratah we don't accept any – rejecting all rolls that require a join
- The wooden reel allows for easy unwinding of the wire
- > Our barbed wire range proudly meets all Australian safety standards, meaning if used correctly it will provide you with the safety and security you need

Waratah barb lifter also available – see page 32






400m



ADVICE FOR FARMERS, FROM FARMERS


"Wire and posts are cheap as an investment... it won't take very long to raise the whole standard of your property up to virtually a fortress.

The financial cost of treating biosecurity breaches can far outweigh the cost of a well designed fencing system." – Duncan Campbell, VIC



Duncan Campbell



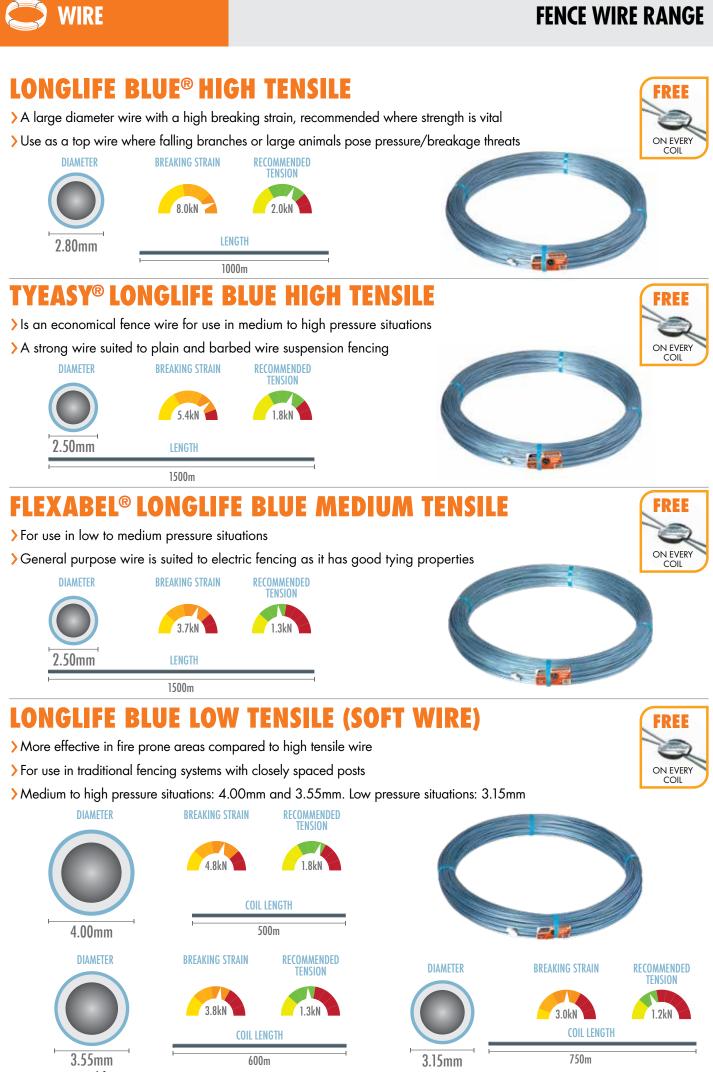


FENCE WIRE RANGE





TEMPELEC® LONGLIFE BLUE

- > A low tensile and versatile fencing solution, ideal for temporary electric fencing and strip grazing
- > Provides greater current-carrying capacity than normal polywires and tapes, and with Longlife Blue coating,

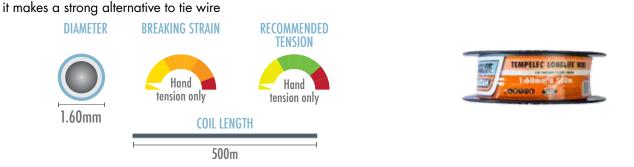

HORSESIGHTER® WIRE

- >UV stabilised PVC coated wire
- > Has finished size of 5.20mm enclosing a low tensile 4.00mm standard galvanized wire
- > White coating provides improved visibility for horses perfect for use as a top wire with Stocksafe-T[®] Longlife Blue 13/122.5/5 horse wire



ADVICE FOR FARMERS, FROM FARMERS

"I did a fair bit of research and one of the reasons I chose Waratah[®] is because it is Australian Made. Using Waratah posts has meant we can put up a fence with 1 person instead of 10 people, reducing our labour costs." – Stuart & Leslie MacKenzie, QLD




Stuart & Leslie MacKenzie





STOCKLOCK® LONGLIFE BLUE®



A range designed to resist high stock pressures, it can cover most farmers' requirements, from secure boundary fencing, to subdivisions, to cell paddocks or laneway systems.

- Ring-joint design favoured for longer spans and suspension fence designs
- Allows movement of the wires to absorb impact and spread load
- Single picket wire has a 'dropper' effect, providing maximum support
- > Features 2.80mm high tensile top and bottom line wires for added strength (all other line wires are 2.50mm)

WIRE SIZE*	SUGGESTED APPLICATION	ROLL LENGTH (M)
10/110/15	AAN NA	100
8/90/30	मत ल ल	200
8/90/15	rt rt rt rt	100
7/90/60	लि तो लि	200
7/90/45	F	500
7/90/30	लि तो लि	200, 400
6/90/45		200
6/90/30		200
6/70/45	F	200
6/70/30	म त	200
5/70/45	M	200
5/70/30	M	200

*8/90/30: 8 line wires; 90cm fence height; 30cm picket spacing




WIRE

12-29



STOCKTITE® LONGLIFE BLUE®



2FF ON EVERY LINE WIRE^

The range features the hinged joint design that is one of the most widely used designs in Australia and around the world and is favoured in conventional fencing design. There is no stronger knot that locks the horizontal or line wires to each other, which has led to extensive use where larger animals are trying to force their way between the horizontal line wires.

- > Hinged joint suited for long strains and will permanently but flexibly secure the picket wires to the line wires, allowing erection over rolling landscape and through gullies
- > Advanced hinged joint construction acts as a suspension system, flexing with stock pressures and then rebounding back into shape
- > Features 2.80mm high tensile top and bottom line wires for added strength; creating less need for selvedge wires, saving time and money (all other line wires are 2.50mm)
- > Animals can be deterred from burrowing under your fence with the Stocktite skirt 6/51/15, a dedicated section that can be attached to an existing fence line as an apron layout using Ringmaster[®] clips

WIRE SIZE*	SUGGESTED APPLICATION	roll Length (M)
8/115/15	MAMM	100
8/90/30	MAN M	200, 500
8/90/15	MAM MM	100
8/80/15	MAMM	100
7/90/30	M AM	200, 500
6/90/30		200
6/70/30	ন ল	200, 500

*8/90/30: 8 line wires; 90cm fence height; 30cm picket spacing


	2.00mm line wire	s
WIRE SIZE	SUGGESTED APPLICATION	ROLL LENGTH (M)
6/51/15	A.	300

^Gripple® not included on dog skirt





STOCKSAFE-T® LONGLIFE BLUE[®]



The range has been specifically designed to prevent animals penetrating the fence.

- > Used to provide an effective barrier against feral animals, such as wild dogs, pigs, wallabies and kangaroos
- > Rigid knot resists vertical wires from being separated, reducing the chance of animals penetrating the fence barrier
- > Size and concentration of animals will help determine the right fence height, picket spacing and tensile strength, to establish an effective barrier against animal incursion
- > Comes with extended wire ends (45cm) for joining or tying off - no need to remove pickets
- > Features 2.80mm high tensile top and bottom line wires for added strength


WIRE	SUGGESTED	ROLL
SIZE*	APPLICATION	length (M)
15/150/15	मनत त त त	100
12/115/15	भने भी भी मि राजी स	250
11/90/15	मने म म म क राज	100
8/90/30	A A M	200, 500
7/90/45	M AM	500
7/90/30	a a a	200, 500
6/70/30	M A	200
	2.00mm line wires	
13/90/15^	The st of	100

*8/90/30: 8 line wires; 90cm fence height; 30cm picket spacing

^ 13/90/15 is manufactured with 2.00mm medium tensile wires





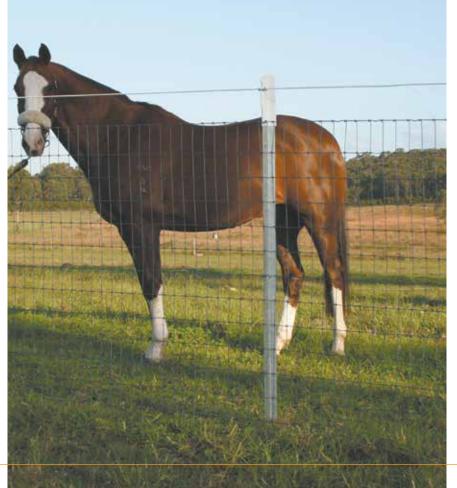

STOCKSAFE-T® LONGLIFE BLUE® WITH APRON

WIRE

With an apron (lap fence) already attached, Stocksafe-T Longlife Blue with apron eliminates the gap between the bottom wire and the ground that appears in traditional fence designs.

- Depending on your fence design, this product can provide an effective barrier against feral animals, such as wild dogs, pigs, wallabies and kangaroos
- Apron is preattached to the bottom horizontal wire via a hinged knot
- 30cm section of apron can then be laid on the ground, reducing penetration or digging under the fence line by feral animals

WIRE SIZE	SUGGESTED APPLICATION	ROLL LENGTH (M)
15/150/15	ANN NA	100, 250, 500
12/115/15	AAR PAR	250
11/90/15	भारते भारती सः १९४१	100

STOCKSAFE-T LONGLIFE BLUE FOR HORSES, DOGS & HOUSE YARDS

Designed to keep horses and dogs secured in a yard.

- Made from low tensile (soft) 3.15mm top and bottom line wires and 2.50mm line and picket wires, it has good stretch under stock pressure and is manufactured without sharp edges on wire, reducing injury to valuable stock
- > Ensures the hooves of horses are not entangled and causing injury
- > Low-tensile wire is favoured to reduce potential injury to horses
- Tight 5cm picket spacings reduce the risk of pawing, stepping or walking down the fence

WIRE SIZE	SUGGESTED APPLICATION	roll Length (M)
13/122.5/5	r at 🏫 🐜	50



STOCKGRIP® LONGLIFE BLUE®



Favoured for longer spans and suspension fence designs. The single picket wire has a 'dropper' effect and creates a stiffness in the fence, whilst the knot allows for some movement of both the picket and horizontal (line) wire. This unique feature allows the fence to absorb impact and spread load.

- > Continuous vertical picket means less need for droppers, saving you time and money
- > The Stockgrip knot allows you to follow the contour in undulating ground, potentially spacing posts further apart
- > Each line wire has tension curves crimped into it allowing for expansion and contraction in temperature extremes and also to resist loss of tension and permanent distortion on impact
- 2.80mm top and bottom high tensile wires add strength; creating less need for selvedge wires saving time and money. For heavy load and high pressure situations selvedge wires are recommended. All other line wires are 2.50mm diameter


WIRE SIZE*	SUGGESTED APPLICATION	roll Length (M)
16/180/15	AAR TAR	250
15/150/15	A A A A A A	250
12/115/15	A A A A A A	250
11/90/15	MAN M	100
8/90/30	MAM M	200
8/90/15	MAM MA	1 00
7/90/30	M A M	200
6/70/30	M A	200

*8/90/30: 8 line wires; 90cm fence height; 30cm picket spacing





LONGLIFE BLUE® NETTING



The range is designed for a wide variety of applications.

- > Typically used for small feral animals and also for containment of domestic animals i.e. chickens.
- Netting pattern is produced in reverse twist to better absorb impact
- > Two-ply selvedge wire is used to give the netting added strength
- > For light pressure applications the 1.4mm wire is most suitable, for heavy use high pressure applications in highly corrosive environments the 1.8mm wire is better suited
- For tighter exclusion applications the 3cm mesh spacing is recommended to prevent smaller animals such as kittens (baby rabbits) from getting through the fence. Commonly used at ground level



Livestock, exclusion & conservation

WIRE SIZE*	roll Length (M)	WIRE SIZE*	roll Length (M)
4.0cm MESH	1.4mm	3.0cm MESH	1.4mm
30/4.0/1.40	100	30/3.0/1.40	100
60/4.0/1.40	100	60/3.0/1.40	100
90/4.0/1.40	50, 100	90/3.0/1.40	50, 100
105/4.0/1.40	50, 100	105/3.0/1.40	50, 100
180/4.0/1.40	50	120/3.0/1.40	50, 100
4.0cm MESH	1.8mm	5.0cm MESH^	1.6mm
20/40/100	100	00/50/140	50

4.0cm MESH	1.8mm	5.0cm MESH [^]	1.6mm
30/4.0/1.80	100	90/5.0/1.60	50
60/4.0/1.80	100	120/5.0/1.60	50
90/4.0/1.80	50, 100	180/5.0/1.60	50
105/4.0/1.80	50, 100		
180/4.0/1.80	50		


*30/4.0/1.40: 30cm fence height; 4cm mesh spacings; 1.40mm wire diameter


^recommended for poultry mesh applications

່ມ




COMMON FENCE DESIGNS

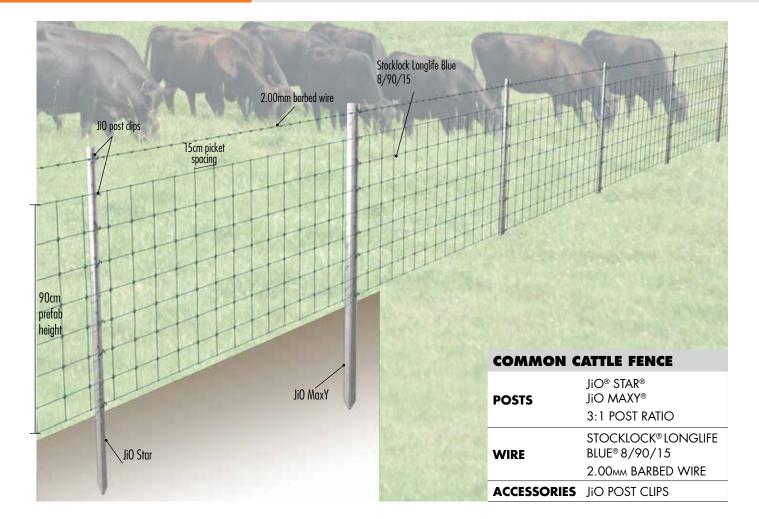

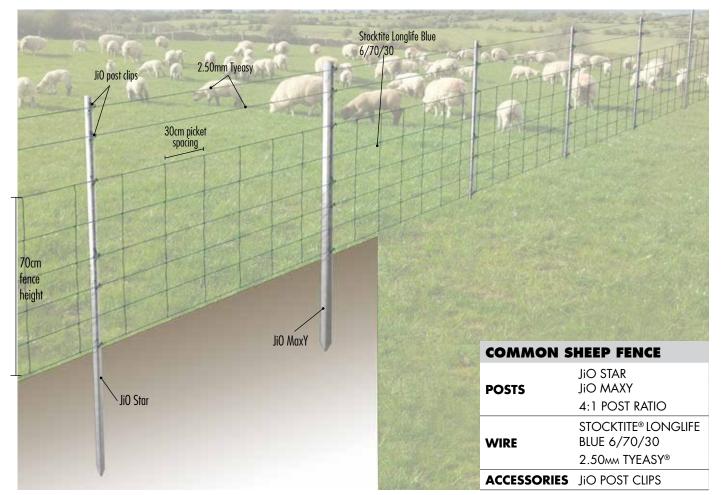

COMMON FENCE DESIGNS

Stocklock Longlife Blue 7/90/30 2.00mm barbed wire JiO post clips 30cm picket spacing 90cm prefab height **MIXED LIVESTOCK FENCE** JiO MaxY JiO[®] STAR[®] JiO MAXY® POSTS 3:1 POST RATIO STOCKLOCK® LONGLIFE BLUE® 7/90/30 WIRE JiO Star 2.00mm BARBED WIRE ACCESSORIES JIO POST CLIPS

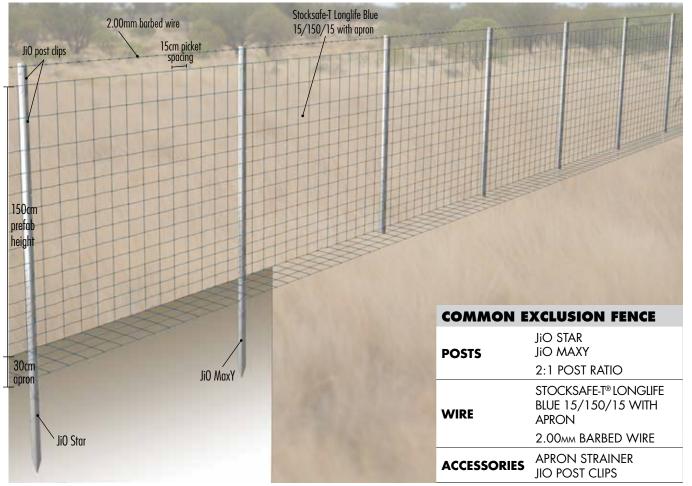

WIRE 🦯

27

WARATAH

WIRE

12-29





PREFABRICATED WIRE SPECIFICATIONS

WIRE GAUGE GUIDE

Diameter (mm)	1.57	1.60	1.80	2.00	2.50	2.80	3.15	3.55	4.00	5.20
Gauge	16	16	15	14	12.5	11	10	9	8	5.5


Wire diameter may still sometimes be described in terms of the imperial wire gauge system. This table notes the conversion equivalents in the metric system that we use at Waratah®.

KNOW YOUR PREFABRICATED WIRE

Height of fence from top to bottom wire e.g. 70cm 30 5 70 Number of Spacing between horizontal line vertical wires e.g. wires

4cm mesh spacing

KNOW YOUR NETTING



1.40mm wire diameter

30cm

PREFABRICATED WIRE SUGGESTED APPLICATION



Cattle











Lambs



Pigs

6/90/30

230mm

200mm

180mm

150mm

140mm











NOMINAL LINE WIRE SPACINGS

B	6/51	/15
FE BLUE	125mm	
LONGLIFI	115mm	
	100mm	
	90mm	
210	80mm	

6/7()/30	
180mm		
150mm		
140mm		
130mm		
115mm		

7/9	7/90/30	
200mm		
180mm		
150mm		
140mm		
130mm		
115mm		

140mm 130mm 115mm 100mm 90mm		
140mm 130mm 115mm 100mm 90mm	8/80/	′15
130mm 115mm 100mm 90mm	150mm	
115mm 100mm 90mm	140mm	
100mm 90mm	130mm	
90mm	115mm	
	100mm	
75mm	90mm	
	75mm 🛛	

8/90/15 8/90/30		
180mm		
150mm		
140mm		
130mm		
115mm		
100mm		
90mm		

8/11	5/15
230mm	
200mm	
180mm	
150mm	
140mm	
130mm	
_	

115mm

WIRE SPECIFICATIONS



NOMINAL LINE WIRE SPACINGS



	•
- 1-	
-	
-	
C	2
	5
	·. ·
_	
- 14	
	5
_	
-	
-	
C	2
_	£
_	
-	
- 14	
- 64	
-	
	2
\geq	-
ž	
	ς
<u>ر</u>	•
-	
Ū	
~	
2	×.
\geq	-
2	5
	•
Sector	_
	1
C	2
- 6	
- i J	•
	•
0	_
0	_
- C	2
- 5	-
- 57	
- 5	<u>ح</u>
C	2
- 62	
- 57	•
-	•

51mm

	12/11
13/90/15	178mm
13/90/13	
127mm	152mm
127mm	102mm
12711111	102mm
76mm	TUZIIIII
76mm	102mm
76mm	102mm
76mm	100
76mm	102mm
76mm	76mm
51mm	76mm
51mm	76mm
51mm	7/

76mm

2/115	5/15	
78mm		
52mm		
02mm		
02mm		
02mm		

102mm

	13/13
	178mm
5/5	178mm
	127mm
	102mm
	76mm
	76mm
	76mm
	76mm

16/180/15				
178mm				
178mm				
127mm				
102mm				
102mm				
102mm				
76mm				
76mm				
102mm				
127mm				
127mm				

PRON	11
A H	wi
JE WIT	1271
IFE BLI	1271
LONGL	1271
H.	102
KSAI	76m
ğ	76m
S	76m
GRI	76m
ğ	76m
ST	51m
	76m

11/90/15 with apron	178mm	
127mm	152mm	
127mm	102mm	
12711111	102mm	
127mm	102mm	
102mm	102mm	
76mm	102mm	
76mm	102mm	
76mm	76mm	
76mm	76mm	
76mm	76mm	
51mm	76mm	
76mm	102mm	
76mm	104mm	
76mm		
76mm	102mm	

8mm	
8mm	
7mm	
2mm	
2mm	
2mm	

NR

2-29

127 102 102 102 102mm 102mm 102mm 102mm 76mm 76mm 76mm 76mm 102mm 102mm 102mm

29

The Australian Standard AS2423:2002 tolerance is ±25mm

WARATA





ACCESSORIES

- > Save time and money by having the right tool for the job with Waratah®'s marketleading range of tools and accessories
- > Whether you are constructing or maintaining your fence, all our equipment is designed to work together with the Waratah Fencing System[™]

Waratah accessories simplify installation, eliminating the need for machinery and extending the life of Longlife Blue® fence wire.

Covered in this section:

Fencing tools



Fencing accessories

Wire joiners





FENCING TOOLS






EZYSLOT[®] AND EZYPIPE[®] STRAINER POST DRIVER

Essential for manual installation, these heavy duty, 19kg strainer post drivers have square or round profiles to fit snugly over Ezyslot/Ezypipe posts

> Reinforced gusset handles for added strength



STAR[®] POST LIFTER

- > Heavy-duty construction with durable electro-plated finish and simple pump-action handle
- > Hardened jaws with roughened face for increased grip and efficiency
- > Designed to be used at the base of the post



BARB WIRE REEL LIFTER

- Designed to make lifting barbed wire reels safe and easy
- > Requires two (2) people to lift safely
- Rated to lift 75kgs
- > Features rubber handles for comfort



STAR POST DRIVER 80NB

- A fast and easy way to manually install all Waratah® Star posts, including both JiO[®] MaxY[®] and JiO Star posts
- >9kg mass for optimum driving force and less effort
- > Offset handles for ergonomic use and reinforced gusset handles for added strength

FENCING TOOLS

ACCESSORIES



THREE-WAY WIRE SPINNER

A multipurpose tool for safely spinning out plain and barbed wire without tangling or overrunning

- Operates in a stationary position or as a 'hand cart' along the fence line for barbed wire
- > Double cradle wire spinners also available



THREE-WAY WIRE SPINNER WHEELS*

- > Removable gel filled wheels prevents wheel puncturing
- > Easily switch between stationary and movable spinner
- > Jockey stand to hold your spinner in place
- > Can be towed behind a farm vehicle
- *Wire spinner not included



WEDGELOCK[®] CLAMP – STANDARD

- > Hold prefabricated wire and netting in place while Wizard® wire strainers (hooked top and bottom of the clamp) evenly tension the wire
- > Standard unit: available in 1.00m, 1.30m and 1.60m lengths to suit prefabricated fence heights



WEDGELOCK[®] CLAMP – CONTRACTOR

- > Performs the same action as the standard, with hardened wedges for greater holding and reinforced clamp action
- > Designed and tested for use by fencing professionals.
- > Features an additional wedge for tighter securing of the top and bottom selvedge wires.
- Contractor unit: available in 1.60m, 1.90m and 2.00m lengths to suit prefabricated fence heights





FENCING TOOLS



WIZARD® WIRE STRAINER – STANDARD


- Grips wire securely to efficiently tension plain and barbed fence wire
- > Used with the Wedgelock® clamp to strain prefabricated fencing
- 1.80m long chain



THUMPA® PNEUMATIC POST DRIVER

- An easy way to drive JiO[®] Star[®], JiO MaxY[®] and Gripfast[®] trellis posts into virtually any terrain faster than a manual driver, saving time and money
- Change between post types in seconds with a simple twist and release system
- Can also be attached to a mechanically assisted device on a vehicle to assist lifting the driver on and off posts
- Air compressor requirements: for light use ~25CFM, for heavy use >37CFM. Recommended pressure: 80–100PSI. Do not run above 100PSI





WIZARD® WIRE STRAINER – CONTRACTOR

- > Grips wire securely to efficiently tension plain and barbed fence wire
- > Used with the Wedgelock clamp to strain prefabricated fencing
- 4.50m long chain for use with larger diameter posts for longer fence strain. Also has a longer handle for easier operation and more leverage (30% less effort)



EZYPIPE®/EZYSLOT® GUIDE AND ANCHOR PIN

- Change between post types in seconds with a simple twist and release system
- > For use on Waratah Ezypipe and Ezyslot
- > For use with Thumpa pneumatic post driver
- > 120mm pipe guide also available

FENCING TOOLS & ACCESSORIES



TENSER SENSER® WIRE TENSIONING GAUGE

- > Indicates approximate wire tension to more accurately strain wire – helping to prolong fence life and reduce maintenance time and costs
- > Can be used with plain, barbed, high tensile and prefabricated fencing systems
- > Pre-assembled and calibrated for immediate use



E CUTTE FENCING PLIERS*

- >Waratah wire cutters: a powerful cutter with centric precision cutting edges, designed for use with all fence wire types
- >Waratah fencing pliers: a combination plier designed for gripping surfaces particularly suited to flat material and medium to hard wire

*Product covered by Bahco® guarantee



ACCESSORIES

RINGMASTER® PNEUMATIC **CLIP GUN**

- > A fast, easy way to secure clips to fence wires, reducing physical effort and increasing the number of clips installed per hour
- > Designed for use with Waratah Ringmaster Longlife Blue[®] clips (see page 36)
- > Recommended air pressure: optimum 80PSI. Do not operate above 100PSI



STAY PINS

- > Conveniently pre-cut 30cm straight lengths to save time with no sharp ends for safe use
- > Made from 10mm hot dipped galvanized rod
- > Ideally suited for timber strainer H box assemblies



مCCESSORIES ه

FENCING ACCESSORIES



HEAVY DUTY PINLOCK INSULATOR

- > Twin pin system locks the insulator firmly in place
- The increased diameter front pin withstands higher wire pressure from stock impact
- > Twin pin matches with the existing JIO® post holes for super fast installation requiring no tools
- > Pinlock wire retention with twist lock closure allows for easy installation/removal of wire under tension



LONGLIFE BLUE FARMERS FRIEND® TIE WIRE

- Packaged in an easy to carry 3kg reel which is easy to carry
- Longlife Blue coating for maximum corrosion protection
- > Handy for tying off wire to posts, repairs and general maintenance



JIO PORCELAIN CLIPS

>Waratah has a range of electric clips to suit your needs

> JiO porcelain cross over clips:

- Securely hold your porcelain insulators through the cross over Longlife Blue® clip design

> Porcelain dual offset:

 Can securely hold 2 porcelain insulators simultaneously available in 2 sizes 80mm/40mm & 80mm/80mm

> Insulators included with every clip



RINGMASTER® LONGLIFE BLUE CLIPS

- > Effectively secures all types of fence wire
- > Recommended for use with the Waratah Ringmaster clip gun
- >Made from 1.80mm Longlife Blue wire



JiO[®] POST CLIPS

- > Effectively secure fence wires to JiO posts, up to 20% faster than traditional clips
- > Simple and easy to use no tools required
- >Made from Longlife Blue® wire



STAR® POST CLIPS

- > Effectively secure fence wires to Star posts
- > Economical and easy to use with fastening tool
- >Made from Longlife Blue wire
- > Can be used on JiO and GalStar® posts



CUT-LENGTH TIE WIRE

- Conveniently pre-cut 30cm straight wire lengths to save time with no sharp ends for safe use
- >Made from Longlife Blue wire
- > Ties wire to the back of the post
- Available in packs of: 2.50mm x 30cm lengths 3.15mm x 30cm lengths



BARBED STAPLES

- > An ideal way to secure fence wire to timber posts, with Longlife Blue coating to prolong the life of your fence
- Provide greater holding pressure
- > Available in wire diameters from 3.15mm to 4.00mm and in lengths from 32mm to 50mm
- > Available in 2.5kg, 5kg and 15kg pack sizes









POST EXTENSIONS

- > A straight, 45 degrees or 90 degrees extension that can be attached to JiO[®] posts
- > Unique JiO holes allow the use of clips and related accessories
- > Ezypipe[®] strainer post extension for 45° and 90° also available



ANTI-SINK PLATES

- Increases the surface area of fence posts to reduce posts sinking in soft or disturbed soils
- > Designed to fit all Waratah® posts, including Gripfast®
- >Made from 1.40mm galvanized steel (275g/m²)



STAR® & MAXY® POST CAPS

- > High-visibility, UV resistant Star post caps make the posts safer and more visible
- > White or yellow HDPE material for strength and fade resistance
- Pre-formed slots on white Star and MaxY post caps accommodate a wide range of electric accessories
- > Locking strap on yellow post cap prevents cap loss





EZYSLOT






EZYPIPE

GATE FITTINGS

- > Ezyslot[®] and Ezypipe gate fittings for use with their respective strainer post type
- Corrosion resistant, heavy duty, hot dipped galvanized steel
- > Bolts together in minutes with no welding
- > Ring, chain and latch set included



CATTLE YARD STRAND

- Cost effective alternative to traditional timber post and rail systems that is more flexible under stock pressure
- > Made from heavy galvanized, high tensile wire
- The turnbuckle allows tension to be adjusted at any time
- > Use strand grip to attach cattle yard strand to turnbuckles
- > Provides excellent visibility across cattle yards



ACCESSORIES

6MM GALVANIZED WIRE ROPE 100M

- >Manufactured from standard galvanized wire to form 7x7 strand wire
- Maximum breaking load of 26.8kN
- > Loop on one end for easy attachment
- > Suitable for heavy duty applications that require greater holding capacity with more flexibility
- > Can be used with Waratah[®] flood posts, Gripple[®] Dynamic D6 and around cattle yards for added support

FLOOD POSTS



The Waratah flood post is an innovative and unique floating fence system designed for use across waterways and flood-prone areas to help protect both fences and livestock.

- > Durable made from strong polyethylene which doesn't rust and is UV/fade resistant
- > Insulated may be used for electric fence applications
- > Versatile 11 stainless steel eyelets and slots for horse and electric fence tape
- > Foot step for easy installation
- > Weighted ballast fill with 6 litres of water using removable bung to set ballast at desired water level. This allows the posts to rise with the water level lifting the fence wires above floating debris

HEIGHT (TOP TO GROUND)	HEIGHT (TOTAL UNIT)	WIDTH	GROSS WEIGHT (WITHOUT BALLAST)	Note: Other components installation sold separate
1280mm	1630mm	320mm	8.75kg	

ts for ely



WIRE JOINERS







GRIPPLE PLUS[™]

- > Gripple Plus wire joiners save time and effort when joining wires, tensioning or terminating wire at a strainer post
- > The patented ceramic locking mechanism delivers a strong grip and can take higher loads
- > Available in small, medium and large
- > Suitable for electric fencing applications
- > Housing is die-cast zinc for superior corrosion protection

GRIPPLE PLUS SMALL

> Suitable for use with 1.40mm - 2.20mm wire

GRIPPLE PLUS MEDIUM

> Suitable for use with 2.00mm - 3.25mm wire

GRIPPLE PLUS LARGE

> Suitable for use with 3.25mm - 4.20mm wire





GRIPPLE[®] T-CLIP[™]/T-CLIP LARGE

- > A great alternative to tying off wire around strainer posts no need for knots, twisting or staples, saving both time and labour
- >T-Clip suitable for 1.80mm-3.25mm wire
- > Use the T-Clip at either end of the fence line to tie-off wire
- > Allows consistent replication and is up to 5 times faster than a manual tie-off
- > Housing is die-cast zinc for superior corrosion protection
- > Recommended for round strainer posts
- >T-Clip large suitable for 4.00mm plain wire & barbed wire



ONE WAY GRIPPLE

- > Engineered with one channel to butt-up against an end post
- > Integral safety channel to protect the tail wire
- > Ideal for the fast termination of wire or use with end posts in vineyards, orchards and fencing











GRIPPLE® C-CLIP

- > Perfect for attaching wires onto a cable
- > An innovative, twist-on device
- > Allows horizontal and vertical adjustment along the wire rope
- > Cams lock solidly in place even at angles up to 60°
- > Suitable for suspension of Waratah® flood posts

GRIPPLE DYNAMIC D4 & D6

- > Makes securing cable quick and simple. For maximum strength loop the cable around the base and secure back through the Gripple Dynamic
- > Lockable, inbuilt cam-lock to lock the cable in place to prevent slipping
- >Can be tensioned with the standard Gripple tool
- > The Gripple Dynamic D4 is suited for 4mm to 4.75mm wire rope
- > The Gripple Dynamic D6 is suited to the 6mm galvanized wire rope

H-POST®/ANCHOR-FAST® KIT

- > Contains a 4mm x 5m heavy galvanized wire rope and Gripple Dynamic D4
- > Can be used as a wire brace or tie-back in multiple strainer post assembly setups
- > Simple, one person assembly, no wire tying skills needed
- > Up to 75% faster to install than traditional methods
- > Re-tensioning capability makes this one of the most versatile products available for fence installation and maintenance
- >Max working load 9.5kN

GRIPPLE GP90

- > Join and tension in one, in under one minute
- > Eliminates tying & knotting of T-joins and other complex joining methods
- >600kg line load in case of wind lift or heavy crop weight
- > Create overhead structures for cloth/net support, crop/down wires, or fruit canopy

GRIPPLE TENSIONING TOOLS

CONTRACTOR TOOL

> Metal tool for use with all Gripple sizes makes light work of tensioning your wire by delivering a 10:1 mechanical advantage


STANDARD TOOL

> Available with the Gripple starter pack only – includes 50 Gripple Plus medium wire joiners. A cost saving of 25%




WIRE JOINERS



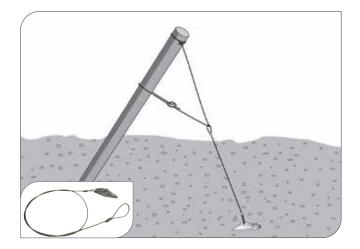


GROUND ANCHOR

- Ready to use ground anchor simply drive in, engage and instantly load
- > Supplied with 4mm stainless steel wire rope (1.50m long) for maximum corrosion resistance
- > Suitable for a variety of soils
- Combine with H-Post[®] or Anchor-Fast[®] kit to create complete anchoring solution
- >No. 3 is suitable for medium loads with an anchor 120mm long x 40mm wide
- No. 4 is suitable for heavy loads with an anchor 180mm long x 70mm wide

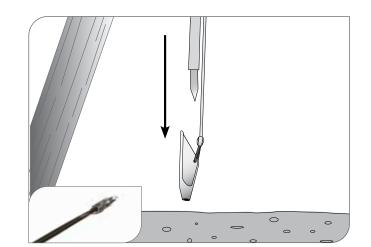


GROUND ANCHOR DRIVE

- > 1.75m installation tool for Terra-Lock[™] anchor system and ground anchor
- > Purpose engineered for toughness and durability, making it capable of penetrating the toughest soil
- > Features specific head profiles to match anchors



TERRA-LOCK ANCHOR

- > Easily installed and instantly loaded anchor system
- > Terra-Lock anchors are designed to provide drive efficiency and maximum load capacity across a wide range of applications including erosion control and soil stabilisation
- > Supplied with a 1.5m long 4mm stainless steel wire rope for in-ground strength
- > Meets the requirements of the most demanding erosion control installations where increased performance characteristics are required over conventional pins, stakes and staples



GRIPPLE® TERRA-PINS & DRIVE TOOL

- > Designed to hold all types of turf reinforcement matting, erosion blankets, geotextiles and landscaping fabrics
- >Quick and easy installation with the Gripple Terra-Pin[™] drive tool
- > Available for both hard and soft ground

BUILD & MAINTAIN

HOW TO BUILD YOUR FENCE

BUILD STEP-BY-STEP

Using quality Waratah products and the right accessories will help even first timers do a professional job. Learn more about the right steps to building a high-performing fence below.



HOW TO MAINTAIN YOUR FENCE

Even the very best fences require some maintenance to ensure ongoing peak performance. Walk or drive along your fence lines regularly to check for fence line failure points. Most maintenance can be done on the spot using Waratah tools and accessories. This will extend the working life of your new fence line, saving you time and money in the long run.

CLEAR ALONG FENCE LINES

Remove any debris or overgrown grass from around the fence. This helps prevent corrosion and heat damage in the event of a fire and minimises the risk of animals using debris to help breach the fence. Spray fence line to reduce foliage.

REPAIR EROSION POINTS

After heavy rain, check that soil erosion under your fence does not compromise your boundary and let stock out or unwanted animals in.

CHECK POSTS AND WIRE TENSION

Straighten or replace broken posts with the same or stronger posts like the JiO® MaxY®. Use a Tenser Senser® to check wires do not relax over time, and a Wizard® wire strainer and Gripple® wire joiners to correct any issues.

WARATA

Want more advice? Scan the QR code

5

"Employing Australians to manufacture world renowned fencing products in Australia"

MAG

ustralian



Prepared by InfraBuild Wire Pty Limited ABN 59 000 010 873. Specifications or technical data referred to in this publication are subject to change, variation and/or improvement without notice and no warranty as to suitability for any use is made. Users of this publication should check all information to satisfy themselves as to its appropriateness and adequacy for their purposes. Unless required by law, the company accepts no responsibility for any loss, damage or consequence resulting from the use of this publication. Photographs are representative only of typical applications. This brochure is not an offer to trade and shall not form part of the trading terms in any transaction. © Copyright 2021 InfraBuild Wire Pty Limited. All Trademarks and Registered Trademarks referred to in this publication are the property of InfraBuild Wire Pty Limited, excluding Gripple, registered to Gripple Ltd. Waratah® guarantees that the Longlife® product range will provide best in class functionality unless abnormally severe corrosive conditions prevail, including use in regions within a few kilometres of surf beaches and polluting sources and where chemical contaminants (e.g. fertilisers) are in use. InfraBuild Wire Pty Limited, Ingall Street, Mayfield, NSW 2304. RQID-1881. Printed January 2021.

Available at:

SEE WHAT WARATAH FENCING CAN MEAN FOR YOU waratahfencing.com.au